(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 10 June 2004 (10.06.2004)

PCT

(10) International Publication Number WO 2004/049705 A1

(51) International Patent Classification7: 5/782

H04N 5/445,

(21) International Application Number:

PCT/IB2003/004919

(22) International Filing Date: 31 October 2003 (31.10.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

02102622.4

EP 22 November 2002 (22.11.2002)

- (71) Applicant (for all designated States except US): KONIN-KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): GRUBER, Thomas [AT/AT]; Triester Strasse 64, A-1101 Vienna (AT).
- (74) Agent: RÖGGLA, Harald; Philips Intellectual Property & Standards, Triester Strasse 64, A-1101 Vienna (AT).


- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DEVICE FOR RECEIVING A SIGNAL CONTAINING TEXT INFORMATION THAT CAN BE USED FOR PRO-GRAMMING THE RECEPTION

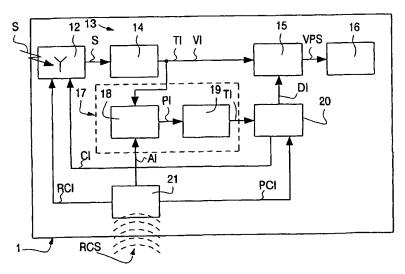

(57) Abstract: In a device (1) for receiving a signal (S) that can be received via a selectable reception channel, which signal (S) represents visually presentable video information (VI) and text information (TI) contained in the visually presentable video information (VI), firstly, reception stage (12) is provided, which is designed for the channel-selective reception of the signal (S) in a controllable manner as a function of control information (CI) that can be supplied to the reception stage (12), and, further, an extraction stage (17) is provided, to which the video information (VI) can be sent and which is designed to extract the text information (TI) contained in the visually presentable video information (VI), and, further, programming stage (20) is provided, which, using the extracted text information (TI), is designed for the programmable provision of the control information (CI) for the reception stage (12).